



"Go Anywhere" Personal Alarm

4G Pendant - User Manual



Version 2.0

Alerting Devices Australia Pty Ltd T/A Safe-Life
5/270 Lower Dandenong Road | Mordialloc VIC 3195
Phone: 03 9588 0392 | Email: sales@safelife.com.au
www.safelife.com.au



Important Notices

Pacemaker Users

⚠ If you use a pacemaker, consult your doctor before using this device.

SIM Card and Annual Renewal

Your Safe-Life Pendant comes with a SIM card pre-charged for 12 months of service. Note the activation date shown on the M2Mone information sheet included with your pendant.

You will receive an invoice one month before your renewal date. To continue uninterrupted service, renew before the anniversary date. If no response is received after the renewal date, the SIM account will be terminated.


i If you do not receive an invoice at least 14 days before your renewal date, contact us immediately: 03 9588 0392 or sales@safelife.com.au. Please make a diary note of your renewal date as a backup.

If you purchased your pendant elsewhere and need to supply your own SIM card, any provider on the Telstra, Vodafone, or Optus networks will work. Ensure the account has automatic top-up enabled so it does not expire unexpectedly.

Initial Testing — Required

⚠ Your pendant is not considered operational until you have completed a successful test. Press the SOS button and confirm that all programmed emergency contacts receive the alert message. This verifies the programming is correct and all contact numbers are valid.

Regular testing is required — at least once a month is strongly recommended.

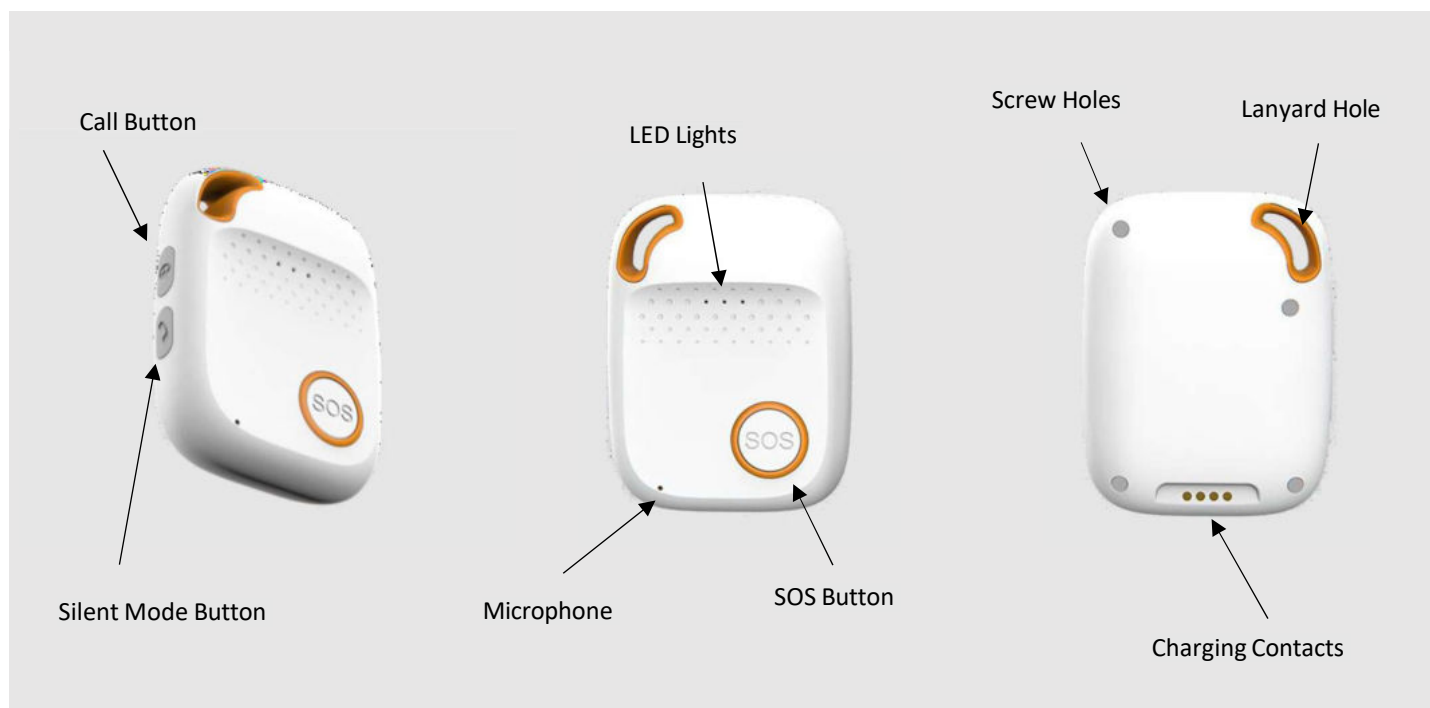

About Your Safe-Life Pendant

The Safe-Life "Go Anywhere" Personal Alarm is a 4G pendant designed to support the safety and independence of people with medical conditions or those at risk. It combines GPS tracking, falls detection, an SOS alarm, and two-way calling in a compact, wearable pendant.

Key Features

- SOS button — sends an alert with GPS location to up to 10 emergency contacts
- Automatic falls detection — sends an alert when a fall is detected
- Real-time GPS location — uses GPS, Bluetooth, Wi-Fi, and mobile network (LBS) to determine position. Note: Bluetooth and Wi-Fi are used for location purposes only, not general connectivity
- Two-way voice calling — emergency contacts can call straight into the pendant
- Side call button — directly calls a programmed emergency contact
- Alarm clock and medication reminders
- Geo fence — alerts contacts if the wearer leaves a defined area
- No motion alarm — alerts contacts if the pendant has not moved for a set period
- IP67 waterproof rating — suitable for showering
- Smart Docking Hub with Bluetooth beacon for accurate indoor location
- LED indicator lights for network, location, and battery status

Pendant Specifications

Dimensions	62mm x 47mm x 17mm
Weight	53g
Battery	Rechargeable lithium, 3.7V, 1000mAh
Charging	5V DC (via docking hub)
Waterproof	IP67 (suitable for showering — see care section for chemical guidance)
Network	4G LTE — Telstra network (calls, SMS, and data)
Location	GPS, Bluetooth Beacon, Wi-Fi, LBS (mobile towers)

LED Indicator Lights

The pendant has three LED indicator lights on the front face: green for cellular signal, blue for location positioning, and red for power and battery.

Green LED — Cellular Signal

GREEN LED	Single flash every 3 seconds	Double flash every 3 seconds
Meaning	Connected to the cellular network. The pendant can make and receive calls and send and receive SMS.	Registered to the network and connected to the monitoring server via data (GPRS).

Blue LED — Location / GPS

BLUE LED	Single rapid flash every 3 seconds	Double rapid flash every 3 seconds	Light off
Meaning	No location fix currently available.	Location fix obtained.	Not currently updating location. A recent fix may have been obtained previously.

Red LED — Power and Battery

RED LED	Solid red	Double rapid flash every 3 seconds	Rapid blinking	Off or slow blink
Meaning	Battery fully charged.	Bluetooth connected to docking hub.	Battery below 20% — charge the pendant soon.	Currently charging.

Getting Started

What is in the Box

- Safe-Life Pendant
- Smart Docking Hub (charging station)
- USB charging cable and plug pack
- Small screwdriver (for SIM card cover)
- Lanyard
- SIM card (if purchased directly from Safe-Life — already installed and activated)
- Quick reference card

Pendant Layout

Front face	Touch screen, SOS button, LED indicator lights, microphone, lanyard hole
Top side button	Call button — press and hold to call your programmed contact. Also used to turn the pendant on and off
Lower side button	Silent mode button — double press to toggle voice prompts on or off
Back	Charging contacts, screw holes for SIM card cover

Inserting a SIM Card

If your pendant was purchased directly from Safe-Life, the SIM card is already installed and activated — skip this section.

1. Turn the pendant off (see below).
2. Unscrew the back cover using the included screwdriver and gently lift it off to expose the circuitry.
3. Insert the nano SIM card and slide the retaining cover forward to lock the SIM in position.
4. Replace the back cover carefully. Do not overtighten the screws.
5. Turn the pendant back on.

i The pendant uses a nano SIM on the Telstra network. If using your own SIM, ensure the account has credit and does not require a PIN on startup.

Charging the Pendant

Place the pendant in the docking hub — you will hear "Charging." Connect the hub to power using the supplied USB cable and plug pack.

⚠ Charge the pendant fully before first use and charge daily or whenever the battery is low. The red LED will show solid when fully charged.

If the pendant has been left completely flat for an extended period it may not switch on immediately. Leave it on charge for at least 30 minutes before attempting to turn it on.

Turning the Pendant On and Off

To turn on: Hold down the top side button until the pendant powers up.

To turn off: Press and hold the SOS button, then press the top side button about half a second later. Hold both until the pendant strongly vibrates, then release.

Getting a GPS Fix

When first turned on the pendant needs a few minutes to establish a GPS position. For the quickest fix, go outside or stand near a window. The blue LED will double-flash once a position is obtained.

The pendant uses four location methods in order of accuracy:

- GPS — most accurate, works best outdoors
- Bluetooth Beacon — very accurate indoors when the docking hub is set up (see Smart Docking Hub section). Bluetooth is used for location only, not pairing with phones or other devices
- Wi-Fi — the pendant scans for nearby routers and estimates location based on where those routers are registered. It does not need to connect to your network or require a password. Note: accuracy varies — see below
- LBS (mobile tower) — least accurate, disabled by default and not recommended

⚠ Wi-Fi location can be unreliable depending on how the router was installed. A router connected via ethernet cable will have a known registered location. However, if a router was set up with ethernet in one city and then moved to another location running on power only (common in mesh Wi-Fi setups), the pendant may report the original city rather than the current one. Some routers with no ethernet history may return no location at all. For this reason, treat Wi-Fi location as approximate. When Wi-Fi is used, the location link in the SMS will point to smart-locator.com rather than Google Maps.

When an alarm is triggered, you will receive either a "Now" location (current position) or a "Last Known" location if a live fix could not be obtained at that moment.

Programming Your Pendant

Programming is done by texting SMS commands to the pendant from any mobile phone. Your pendant has likely been programmed by Safe-Life before dispatch — check with us if you are unsure what has been set up.

Use this section when you want to make changes: updating contact numbers, adjusting settings, adding reminders, and so on.

General Rules for SMS Commands

- Commands are not case-sensitive (loc, LOC, and Loc all work)
- No spaces anywhere within a single command
- Commas must be included exactly as shown
- You can send multiple commands in a single SMS by putting each command on a new line. The password only needs to appear once at the start of the message
- Wait for the confirmation reply before sending another SMS
- If no reply is received, check that the SIM card is active and has signal

i Example of multiple commands in one SMS:

123456FL1,2,0

prefix1,Margaret

tz+10

This sets falls detection, the name prefix on alerts, and the time zone all in one message. The password 123456 covers all three commands.

Password

The pendant has a default password of 123456. If a password is active, it must be placed at the beginning of every command. For example, to locate the pendant you would send 123456LOC rather than just LOC.

Default password	123456
Remove password	123456P0
Change password	123456P(new 6-digit number) e.g. 123456P246810

⚠ Passwords must be exactly 6 digits and cannot start with 0. If you forget your password, contact Safe-Life to reset the device.

i For most home users, removing the password (123456P0) simplifies day-to-day use.

Programming Emergency Contacts

Emergency contacts are the people who will be notified when the SOS button is pressed or a fall is detected. You can have between 1 and 10 contacts. This is the most important programming step.

Understanding the Contact Command

```
123456A1,1,0,+61412345678
```

123456	Your password (omit if you have removed the password)
A1	Contact slot number. A1 = first contact, A2 = second, up to A10
1 (second digit)	SMS alert: 1 = send this contact an SMS when alarm triggers, 0 = do not
0 (third digit)	Call out: 1 = pendant will dial this contact after alarm, 0 = do not call out (recommended — see below)
+61412345678	Mobile number including country code. Australia = +61, then drop the leading 0

Call Out — Should You Enable It?

⚠ We strongly recommend setting the call-out digit to 0 (off) for most users. Here is why:

When call-out is enabled, the pendant immediately starts dialling contacts after sending the SMS alerts. This means the pendant line is busy — so any contact who tries to call back in to speak to the wearer will get an engaged signal.

When call-out is disabled, all contacts receive the SMS alert simultaneously and any one of them can call straight into the pendant, which will auto-answer after approximately 5 seconds. This is generally faster and more reliable.

i If a contact uses voicemail, enabling call-out can be problematic. The pendant may connect to voicemail rather than the person, wasting the alert cycle time.

Setting Your Contacts — Examples

First contact, SMS only, no call out:

```
123456A1,1,0,+61412345678
```

Second contact, SMS and call out enabled:

```
123456A2,1,1,+61398765432
```

Managing Contacts

Check all contacts	123456A?
Remove contact 1	123456removeA1
Remove contact 3	123456removeA3

Personalising Alert Messages

By default, alerts say "Help me!" You can add the wearer's name so contacts immediately know who the alert is from:

```
123456prefix1,Margaret
```

Alert messages will then begin with "Margaret — Help me!"

The SOS Alarm

Activating the SOS

Press and hold the SOS button for 3 seconds until the pendant vibrates or plays a voice prompt.

All programmed emergency contacts will simultaneously receive an SMS alert containing:

- The wearer's name (if prefix has been set)
- A location link — Google Maps if located by GPS or Bluetooth beacon, or smart-locator.com if located by Wi-Fi
- Battery level
- Time of alarm

SOS from the Docking Hub

When the pendant is within Bluetooth range of the docking hub and the two are paired, you can also trigger an SOS by pressing and holding the button on the docking hub for 3 to 4 seconds until you hear "The SOS alert has been activated."

 The Bluetooth connection between the pendant and docking hub may drop out from time to time. If Bluetooth is not currently paired, the docking hub button will not activate the pendant's SOS alarm. Do not rely on the docking hub button as the sole means of triggering an alert — always use the pendant's own SOS button where possible.

Receiving an Alert — What Contacts Should Do

 Advise your emergency contacts to disable voicemail on their phone, or at minimum reduce the number of rings before voicemail activates. Voicemail can intercept an incoming call from the pendant and delay emergency response.

1. Open the SMS — tap the location link to see the wearer's location. GPS and Bluetooth locations open in Google Maps; Wi-Fi locations open in smart-locator.com.
2. Call the pendant number back immediately. The pendant will auto-answer after approximately 5 seconds, opening a two-way voice connection.
3. If one contact cannot reach the pendant (e.g. engaged tone), another contact should try immediately.

Cancelling an Accidental SOS

Press the SOS button once (do not hold) to cancel. The pendant will stop the alarm sequence. Note that any SMS messages already sent cannot be recalled — contact your emergency contacts to let them know it was a false alarm.

Direct Calling — Side Call Button

The top side button can be programmed to call a specific emergency contact directly, without triggering a full SOS alert. Press and hold the top side button to place the call. Press the SOS button to cancel the call.

By default this is set to call contact 2. To change which contact it calls:

123456x1,20	(call contact 1 on long press)
123456x2,20	(call contact 2 on long press)
123456x0	(disable the side call button)

⚠ The side call button will only work if the contact it is set to call has the call-out function enabled in their contact programming (third digit = 1).

Incoming Calls to the Pendant

By default, only programmed emergency contacts can call into the pendant. The pendant will auto-answer after approximately 5 seconds of ringing.

Allow any number to call in	123456callin0
Emergency contacts only (default)	123456callin1
Auto-answer after 5 seconds (default)	123456Answer0,5
Require button press to answer	123456Answer1

Voice Prompts

The pendant plays voice prompts for alarms and status notifications. To toggle voice prompts on or off, quickly double-press the lower side button. The pendant will confirm "Voice tone has been turned off" or "Voice tone has been turned on."

Falls Detection

The pendant contains a motion sensor that can automatically detect a fall and send an alert to emergency contacts without the wearer needing to press the SOS button.

How It Works

1. The pendant detects a sudden change in motion consistent with a fall.
2. It plays the voice message "Fall alert has been activated, click SOS button to stop." The wearer has approximately 5 to 10 seconds to cancel before the alert goes out. Note that the SMS to emergency contacts may be sent during this window before the call sequence begins.
3. If not cancelled, an alert is sent to all emergency contacts with location information.

⚠ Falls detection cannot guarantee it will detect every fall. Factors including the direction, speed, and impact surface affect detection. Some normal activities (sport, sitting down heavily) may trigger a false alarm. Test the falls detection occasionally by dropping the pendant from 1 metre onto a bed.

Falls Detection Command

Turn falls detection ON	123456FL1,2,0 (sensitivity 2, no call out)
Turn falls detection OFF	123456FL0

Understanding the Falls Command

123456FL1, 2, 0

FL1	Turn falls detection on (FL0 = off)
2	Sensitivity: 1 = least sensitive, 9 = most sensitive
0	Call out: 0 = do not dial contacts (recommended), 1 = dial contacts after alert

i If you are experiencing frequent false alarms, lower the sensitivity (try 1). If falls are not being detected, increase it (try 4 or 5). Find the setting that works for the wearer's normal activity level.

Falls Detection Disclaimer

The Safe-Life Pendant uses sensors and an algorithm to detect potential falls based on changes in movement. While this provides a meaningful level of additional protection, no falls detection technology can detect every fall, and some falls may not trigger an alarm.

The manual SOS button remains the most reliable way to call for help and should be used in the first instance wherever possible.

Locating the Pendant

On-Demand Location Request

At any time, send the following command to receive the pendant's current location by SMS:

```
123456LOC
```

The reply will include a location link, battery level, speed, and timestamp.

⚠ The LOC command is useful for occasional checks, but should not be used frequently. The SIM card supplied with your pendant is intended for emergency use and regular testing. If the LOC command is used excessively, automated alerts will be triggered in the M2Mone SIM management system — both you and Safe-Life will receive an email notification. If you receive one of these emails, simply reduce your use of the LOC command going forward.

Checking the Battery Level

To check how much battery remains without triggering a location request:

```
123456battery
```

Find Me — Locating a Misplaced Pendant

If you cannot find the pendant and it is within earshot, send this command to make it call out:

```
123456findme
```

The pendant will say "Hi! I'm here" for 30 seconds. Press the SOS button to stop it once found.

⚠ The Find Me feature requires voice prompts to be enabled. It will not work if voice has been turned off.

Alarm Clock and Reminders

The pendant has four alarm slots, each with a choice of pre-recorded message, a set time, and selected days of the week.

Command Structure

```
123456CLK1,1,08:00,3,1,2,3,4,5,6,7
```

CLK1	Alarm slot number (1, 2, 3, or 4)
1	On or off (1 = on, 0 = off)
08:00	Time in 24-hour format
3	Voice message: 1 = alarm clock, 2 = exercise reminder, 3 = medication reminder
1,2,3,4,5,6,7	Days: 1=Mon, 2=Tue, 3=Wed, 4=Thu, 5=Fri, 6=Sat, 7=Sun

Examples

Daily medication reminder at 8:00am every day:

```
123456CLK1,1,08:00,3,1,2,3,4,5,6,7
```

Exercise reminder at 10:00am on Monday and Wednesday only:

```
123456CLK2,1,10:00,2,1,3
```

Turn off alarm slot 1:

```
123456CLK1,0
```

Geo Fence

A geo fence is a virtual boundary around a location. If the pendant moves outside the boundary, all emergency contacts receive an SMS alert. Particularly useful for people who may wander.

Setting Up a Geo Fence

⚠ You must be at the centre of the area you want to set when you send the geo fence command. The pendant uses its current location as the centre point.

To improve location accuracy for geo fence purposes, first increase the location update frequency:

```
123456mode6,01m,01h
```

⚠ Increasing update frequency will shorten battery life. Only use this setting if geo fence monitoring is important for the wearer.

Geo Fence Command

```
123456Geo1,1,0,200m
```

Geo1	Geo fence number (up to 4: Geo1 through Geo4)
1	On or off (1 = on, 0 = off)
0	Alert when leaving (0) or when entering (1) the boundary
200m	Radius. Minimum recommended is 100m to avoid false alerts. Can use km (e.g. 1km)

No Motion Alarm

The no motion alarm alerts contacts if the pendant has not moved for a set period of time. This can help detect if the wearer is inactive, has fallen unconscious, or has taken the pendant off.

i When the pendant is sitting in the docking hub, the no motion alarm will not activate — the device knows it is charging.

No Motion Alarm Command

123456NMO1, 60m, 0

NMO1	No motion alarm on (NMO0 = off)
60m	Time before alert triggers. Use S for seconds, M for minutes, H for hours (e.g. 02h = 2 hours)
0	Call out: 0 = SMS only (recommended), 1 = also dial contacts

Example — alert after 2 hours of no movement:

123456NMO1, 2H, 0

Smart Docking Hub — Indoor Location

The docking hub connects to the pendant via Bluetooth and can be programmed with your home's GPS coordinates. When the pendant is within Bluetooth range (approximately 25 metres) of the hub, it will report the programmed home location rather than attempting a GPS fix — which is useful because GPS signals are often weak indoors.

i This feature is particularly helpful in multi-storey buildings or apartments where GPS can be unreliable.

Setting Up the Docking Hub Coordinates

1. Find your home's GPS coordinates using Google Maps or Apple Maps. In Google Maps, tap and hold on your address to drop a pin — the coordinates appear at the bottom of the screen.
2. Send the following command, substituting your actual coordinates:

123456BL-37.9862, 145.1001

BL	Bluetooth Location command
-37.9862	Latitude (negative for southern hemisphere locations such as Australia)
145.1001	Longitude

⚠ The latitude for Australian addresses will always be a negative number. The leading minus sign is part of the coordinate, not part of the command keyword.

Docking Hub Management

Turn Bluetooth location on	123456BCE1
Turn Bluetooth location off	123456BCE0

⚠ If you take the pendant and docking hub to a different address, the hub will still report the original programmed location until you update it with new coordinates.

Other Useful Commands

Setting the Time Zone

The pendant sets its clock from GPS satellites, but needs to know your time zone to display and report the correct local time. This affects timestamps in all alert messages.

The pendant will generally update automatically when daylight saving begins or ends, but this does not always occur reliably. If timestamps appear one hour off during daylight saving periods, send the updated command manually.

AEST (QLD, NSW, VIC, TAS, ACT)	123456tz+10
AEDT (NSW, VIC, TAS, ACT — daylight saving)	123456tz+11
ACST (SA, NT)	123456tz+9:30
ACDT (SA — daylight saving)	123456tz+10:30
AWST (WA)	123456tz+8

Battery Life and Power Mode

Battery life is affected by network coverage, GPS frequency, temperature, movement, and feature usage. Poor network coverage causes the pendant to work harder to maintain a connection and drains the battery faster.

To extend battery life, use the following power-efficient mode which updates location every 30 minutes:

```
123456mode4,30m
```

Do Not Disturb

Prevents the pendant from making any sounds during set hours — useful at night.

Example — silent from 9pm to 7am:

```
123456ND1,21:00,07:00
```

Turn off with: 123456ND0

Check Current Settings

```
123456status
```

Device Information (IMEI and Firmware)

```
123456V?
```

Live Tracking App

A live location tracking app (Smart-Locator) is optionally available for this device. Please contact Safe-Life before setting this up, as it requires a data package and additional charges apply.

Phone	03 9588 0392
Email	sales@safelife.com.au
Website	www.safelife.com.au

Quick SMS Command Reference

All commands below assume the default password of 123456. Replace with your own password if changed, or omit entirely if password has been removed.

Command	Example	What it does
123456A1,1,0,+61412345678	A(n), (1/0), (1/0), +614XXXXXXX	Set emergency contact
123456A?	A?	Check all emergency contacts
123456removeA1	removeA(n)	Remove emergency contact 1
123456prefix1,Margaret	prefix1,Name	Add name prefix to alerts
123456LOC	LOC	Request current location
123456battery	battery	Check battery level
123456findme	findme	Make pendant call out its location
123456status	status	Check current settings
123456V?	V?	IMEI and firmware version
123456FL1,2,0	FL1, (1-9), (0/1)	Falls detection on (sensitivity 2)
123456FL0	FL0	Falls detection off
123456NMO1,2H,0	NMO1, (time), (0/1)	No motion alarm after 2 hours
123456NMO0	NMO0	No motion alarm off
123456Geo1,1,0,200m	Geo(n), 1, (0/1), (radius)	Set geo fence 200m radius
123456CLK1,1,08:00,3,1,2,3,4,5,6,7	CLK(n), (1/0), (time), (1-3), (days)	Daily medication reminder 8am
123456tz+10	tz+10	Set time zone AEST
123456tz+11	tz+11	Set time zone AEDT (daylight saving)
123456ND1,21:00,07:00	ND1, (start), (end)	Do not disturb 9pm to 7am
123456ND0	ND0	Turn off do not disturb
123456BL-37.9862,145.1001	BL(lat), (long)	Set docking hub home coordinates
123456BCE1	BCE1	Bluetooth beacon location on
123456BCE0	BCE0	Bluetooth beacon location off

Command	Example	What it does
123456x1,20	x(n),20	Set side button to call contact 1
123456x0	x0	Disable side call button
123456callin0	callin0	Allow any number to call in
123456callin1	callin1	Emergency contacts only (default)
123456Answer0,5	Answer0,(secs)	Auto-answer after 5 seconds
123456mode4,30m	mode4,(interval)	Power saving mode (30 min updates)
123456P0	(password)P0	Remove password
123456P246810	P(6 digits)	Set new password

Care and Maintenance

Cleaning

Wipe the pendant with a clean damp cloth. For infection control environments, Clinell Disinfectant Universal Wipes are recommended. Do not use abrasive cleaners or solvents.

Water Resistance

The pendant is rated IP67, meaning it is protected against temporary immersion in up to 1 metre of fresh water for up to 30 minutes. It is suitable for showering.

⚠ Where possible, avoid exposing the pendant to soap, shampoo, conditioner, or other chemicals. If the pendant does come into contact with these, rinse it under clean water promptly. Do not submerge in swimming pools, hot tubs, or saltwater.

Battery

Charge the pendant daily or whenever the battery falls below 20% (indicated by rapid red LED blinking). The battery is not user-replaceable. Use only the supplied docking hub and cable.

General Handling

- Do not store in areas of extreme heat, cold, or humidity
- Do not drop, shake, or knock the pendant
- Do not disassemble or attempt repairs — doing so will void the warranty
- Keep IMEI and SIM numbers confidential
- Turn the pendant off during flights and follow applicable airline restrictions

Warranty

The Safe-Life Pendant is covered by a 12-month warranty from the date of dispatch from Safe-Life against defects in materials and workmanship under normal use.

What is Covered

- Manufacturing defects in materials or workmanship
- Hardware failures under normal operating conditions

What is Not Covered

- Physical damage from drops, impacts, or misuse
- Water damage beyond the IP67 rating (e.g. saltwater, pool chemicals, submersion beyond 1 metre)
- Damage caused by unauthorised repair or modification
- Normal wear and tear

Making a Warranty Claim

1. Contact Safe-Life on 03 9588 0392 or sales@safelife.com.au to obtain an RMA (Return Merchandise Authorisation) number.
2. Pack the pendant securely with your RMA number and a description of the fault.
3. Include proof of purchase (original receipt with date).
4. Return the pendant to Safe-Life postage paid. Safe-Life will not be held responsible for programming lost during repair.

Return Policy

If you are not satisfied with your Safe-Life Pendant, you may return it within 30 days of purchase for a full refund, provided the pendant is in original condition with no damage, all original contents are included, and the pendant was purchased directly from Safe-Life.

Products purchased from a retail outlet or distributor are subject to that retailer's return policy.

Important Disclaimers

Not a Lifesaving Device

⚠ The Safe-Life Pendant is an aid to personal safety and wellbeing. It is not a medical device and should not be relied upon as a guarantee of safety. Regular testing and proper setup are essential to effective operation.

Network and GPS Dependency

The performance of this pendant depends on mobile network coverage, GPS satellite availability, and Wi-Fi networks in the area. Coverage may vary by location. Safe-Life accepts no liability for failures attributable to network outages, poor signal, or GPS unavailability.

User Responsibility

It is the user's responsibility to ensure the device is correctly programmed, the SIM account is active and renewed, the battery is charged, and the device is tested regularly.

Limitation of Liability

To the maximum extent permitted by applicable law, Safe-Life, its importers, distributors, and suppliers shall not be liable for any indirect, consequential, or incidental damages arising from the use or inability to use this device, including but not limited to personal injury, property damage, or loss of any kind.

Safe-Life / Alerting Devices Australia Pty Ltd

5/270 Lower Dandenong Road, Mordialloc VIC 3195
03 9588 0392 | sales@safelife.com.au | www.safelife.com.au



www.safelife.com.au